

PRODUCT FEATURES

Handle : 20 Gauge, Deep Drawn Stainless Steel Recessed Cup
 Hinge : 16 Gauge Continuous, Welded To Door & Riveted To Frame
 Bottom : 16 Gauge With Reinforcing Channels

PRODUCT INFORMATION

Material : Mild Cold Rolled Commercial Quality Steel
 Finish : Baked Pure TGIC Powder Coat
 Construction : Welded One-Piece Structure
 Door : 14 Gauge
 Door Stiffener/Reinforcement : 16 Gauge
 Door Frame : 1x1x1/8 Continuous Angle Iron Steel
 Door Ventilation : 3/4" x 1-1/2" Diamond Perforations Each Door
 Door Latching : Single-Point Latching
 Top : 16 Gauge
 Side : 13 Gauge, Flattened Expanded Metal
 Back : 18 Gauge
 Shelf : None Provided
 Interior Equipment : (2) SGL Prong Wall Hooks And (1) DBL Prong Ceiling Hook Per Opening
 Number Plate : Polished Aluminum Plate
 Assembly : All-Welded


ACCESSORY INFORMATION

Slope Hood : 18 Gauge Continuous Slope Hood
 Lock : #1652 Built-In Combination
 Legs : None Provided
 Base : 4" Concrete Base By Other
 Recess Trim : None Provided

Comments:
 Color : Please Advise Within Reasonable Variation

JOB INFORMATION

**All-Welded Angle-Iron Series
 Three Tier Locker
 18 x 16 x 24/72"
 L3**

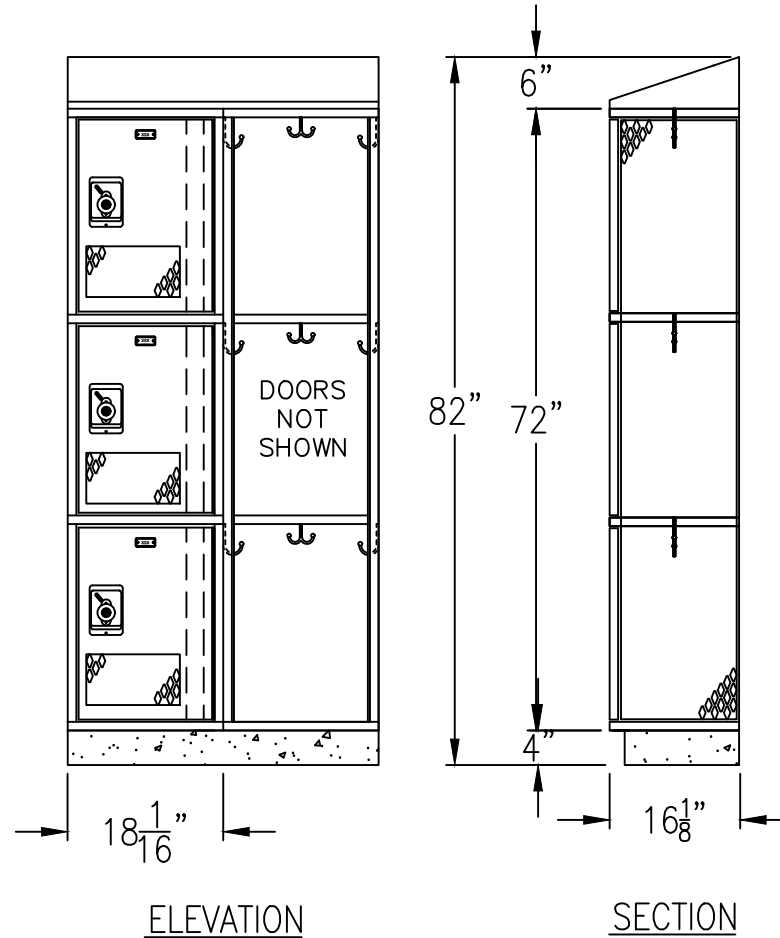

PLEASE BE ADVISED: Lockers Are Square And Measured Based On Square Walls. If Walls Are Not Square, Adjustments To Bases Will Need To Be Made At The Expense Of The Customer To Make Allowances For The Locker Sizes As Specified In The Shop Drawings.

Tolerances in Manufacturing Understood: Fractions $\pm \frac{1}{16}$ ", Decimals $\pm .02$, Degrees $\pm 20^\circ$

NOTICE: All Rights Reserved, ©2024. These Drawings Of Products Described Are Subject To All Patents And Copyrights Held By Lockers Manufacturing.

PLEASE BE ADVISED:
 Shop Drawings Are To Ensure We Understand Your Request. Your Approval Of These Shop Drawings Overrides Any Other Specifications Or Documentation. Please Check And Approve As We Are Going To Manufacture Material As Shown On These Drawings.

